



VISTA L

SLAVE



VISTA L SLAVE

THE FLEXIBILITY OF MODULARITY.

VISTA L, automatic spiral refrigerated 3° C vending machine for the sale of snacks, confectionary, sandwiches, yogurts and other fresh perishable foodstuffs, cans and bottles available in slave version.



VISTA L + LEI700 PLUS

USER INTERFACE

VISTA + HOT MACHINE

- Slave version works together with a machine for hot drinks with a single payment system.
- The alphanumeric keyboard selection is on the hot drinks machine.
- Pull product delivery area illuminated in picking phase product by the user.

Bianchi Vending



LED, LOW VOLTAGE LIGHTING



ENERGY SAVING MODE (OPTION)



COOLING UNIT CLASS A



PRODUCTS DROP SENSOR



REFRIGERATION 3° (FOOD VERSION)



TEMPERATURE CONTROL DEVICE

SPECIFICATIONS

- ELECTRICAL SUPPLY
230 Vac – 50 Hz
- INTERNAL ELECTRICAL SUPPLY
0.7 kW
- INTERNAL TEMPERATURE

Equipped with a powered cooling unit (14.28 cm³) with enhanced features, and can keep perishable food products at 3° C in the three lower trays. All versions are equipped with health control safety device available on the last three trays and when the electronic sensor detect a temperature above the established safety temperature for perishable food products all food sales will be inhibited.

- COOLING UNIT
½ HP monobloc with automatic defrost control
- REFRIGERANT GAS
R 404 A

FEATURES

- This model, which is born slave, allows maximum flexibility of installation according to the location needs.
- Can work in master/slave with up to 2 freestanding hot beverage or snack & food machines with only one set of payment system installed on

the master machine.


- Door with extruded aluminum frame.
- Adjustable tray height.
- Specific tray for triangular sandwiches on the food version.
- Product delivery door locking system, when the machine is in stand by.
- Large window illuminated by led.
- Low-emissivity glaze, no requires heating unit.
- Machine cabinet foamed to ensure complete isolation and prevent leakage with unnecessary energy consumption.
- Door lock with programmable code.
- Automatic self diagnostic control system.
- Products drop sensor.
- Refrigeration unit with a powered compressor easily accessible and removable.
- Standard multi-protocol electronics.
- Compatible with telemetry.

ENVIRONMENT

- Cold unit Class A+.
- Energy Saving Mode: possibility to manage the options off Led lights at certain times.
- In compliance with **ROHS** and **WEEE**.

ZD-VISTA-L-ED02/2016/EN

VERSIONS VISTA L SLAVE	6-41 SL FOOD	6-42 SL COMBI
SELECTIONS/CAPACITY	41 SELECTIONS - 367 PRODUCTS	42 SELECTIONS - 342 PRODUCTS
TRAYS/SPIRALS	6/8	6/8
DIMENSION MM	VISTA L: 1830H x 700W x 870D / WEIGHT 210 KG	

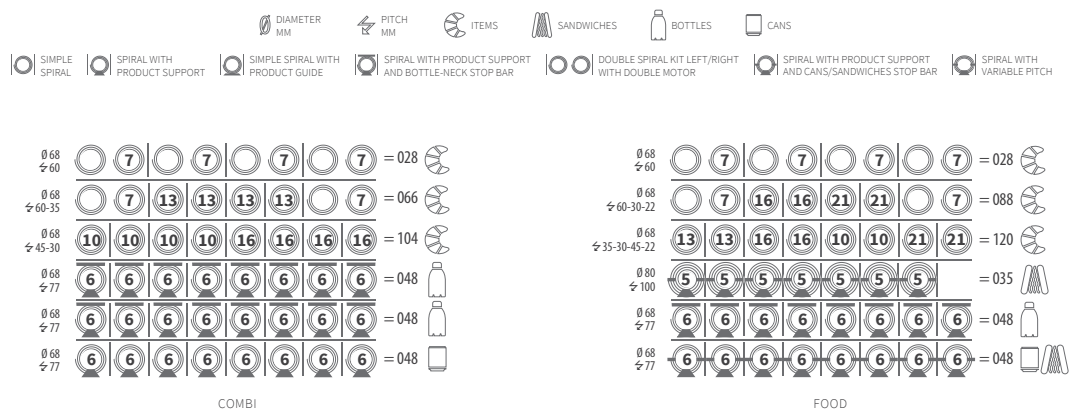

advertendo®